



An AI Learning Heat Pump






Welcome to the future of heating with Gree. Experience unparalleled comfort with Kea AI, the ultimate high-end heat pump system, designed for those who demand the best. Combining cutting edge technology, sleek design, and energy efficiency, Kea Al redefines what it means to be hot.

G-AI Learning Technology, a New Generation of Smart Inverter

Kea AI adopts the AI+ 2.0 intelligent inverter associated control scheme, and pioneers the G-learning intelligent algorithm. With Gree's independently developed AI technology, annual power consumption is reduced by 10% over a standard unit*.

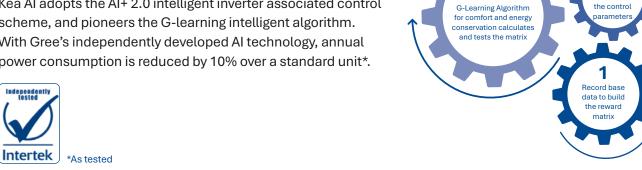

nverter loads

Kea AI Enhanced Heating Capacity

The Kea AI intelligent inverter is connected to the new high frequency compressors developed by Gree. Able to achieve a stable 160Hz operation, low temperature performance is improved by 10%. The Kea AI models offer excellent low temperature heating and will deliver outstanding heating performance at -7°C ambient (H3) and are capable of operating all the way down to -15°C.

G-Learning Algorithm for Comfort and Energy Conservation.

Heating Performance at Different Ambient Temperatures								
Model	GWH09AVCXD-K6DNA1A	GWH12AVDXD-K6DNA1A	GWH18AVEXF-K6DNA1A	GWH24AVEXH-K6DNA1C				
H1 (+7°C)	3.20kW	4.00kW	6.00kW	7.80kW				
H2 (+2°C)	3.85kW	4.00kW	6.40kW	8.20kW				
H3 (-7°C)	2.93kW	3.76kW	5.95kW	7.10kW				



Surfing Louver - All-Round Comfort

Enjoy a significant improvement in air swing performance; delivering balanced, comfortable airflow throughout the entire room. The new surfing louver expands the air supply range with wider swing angles and user defined airflow direction.

The air supply distance is up to 15.5m and the air supply volume is up by 10%. However there is no direct draught as the surfing louver can be adjusted to direct the airflow around occupants.

Intelligent Control

The Kea AI heat pumps come standard with an elegant remote control. This upgraded remote control allows you to control the standard features as well as the enhanced features like the Wi-Fi Bluetooth Efficient Network, the humidity setting and the health function.

Other smart functions can be controlled by the remote controller, including the energy save function, the auto clean function along with timers, sleep and night mode functions.

There are also optional Smart Centralised Controls, wall controllers and the Kea AI is compatible with third party voice control systems.

Gree have also upgraded after sales service with their new Innovative Intelligent Maintenance module and multifunctional tester. This will allow for easier, faster and more accurate diagnosis of system errors.



Hybrid Defrosting Technology (HDT)

Innovative defrosting algorithm with dual defrosting mode to maintain continuous heating all night long.

Defrosting Time Reduced to 2~3 Minutes

Depending on the outside temperature, two methods of defrosting are used. At temperatures from 5°C to -10°C, the algorithm monitors the occurrence of frost on the exchanger and activates the fast-defrosting mode if necessary. Below -10°C, the system automatically switches to the classic Gree intelligent defrosting mode to ensure the proper operation of the device even in extreme weather conditions.

10 Hours of Continuous Heating

HDT allows for uninterrupted heating of the unit even during the defrosting mode, this unique algorithm for frost detection and its thickness on the heat exchanger, plus a newly designed expansion valve that ensures an increase in maximum flow of the working medium, allows for faster and more frequent removal of thin frost thickness – the average thawing time is reduced by 75%, this prevents any significant change in the room temperature – reducing the temperature drop during the defrost cycle from an average of 6~8°C to just 0.7~1.7°C.



Unique algorithm

Unique algorithm to sense the frost accumulated on the condenser and judge the thin frost status. 2 Clever use of heat

A new type of EXV is developed to increase the maximum flow The heat of throttling refrigerant is used for defrosting. (In heating mode, some heat is used for heating while some is used for defrosting.) Rapid removing of thin frost

Adjust system operating parameters to enter the thin frost rapid removing mode.

4 Continuous heating

During

During defrosting, the indoor unit keeps running to ensure normal heating.



Cleaner Air, Smarter Comfort with Kea Al

The new Kea AI has several levels of health protection. Starting with a fully closed air outlet that is designed to stop dust ingress and give a sleeker look when off. An anti-bacterial and mold proof honeycomb filter and an ION generator to help disinfect the air.

There is also an indoor coil self cleaning function, with a 56°C disinfection heating cycle.

To keep the room fresh there is an optional mini energy recovery ventilator (ERV), fresh air in, stale air out.

Plus the outdoor unit has a five step self cleaning function, making service a breeze.



The new Gree Kea Al combines cutting edge technology with elegant, functional, and sleek design, for those who want the best.


The vertical texture on the side layer creates the impression of a much thinner unit.

The simple square shape with rounded corners gives a sleek look.

The partial silver plating embellishes the drawing texture and creates a sense of space.

The injection moulded etching and spraying process is adopted to simulate a brushed metal texture.

Available in either white or black, the indoor is perfect for any home decor.

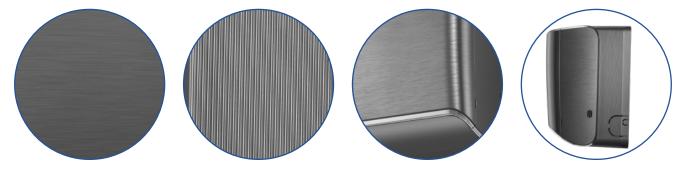

Available in 2 Colours





Intelligent Power Control with G-AI 2.0 Technology

The Kea AI adopts Gree's G-AI 2.0 Learning Technology using Gree's new intelligent algorithm. This new algorithm allows for Power Gear Control. This allows the owner to restrict the amount of power being used whilst maintaining coolness and comfort.

Ultra High Speed Inverter Compressor for Enhanced Efficiency


The Kea AI also adopts Gree's new Ultra High Speed Inverter Compressor Technology. This ground breaking technology allows the compressor to run from 10 to 160Hz. (1Hz = 1 rps) This is achieved using Gree's real time drive control, allowing for greater efficiency and stability at high frequency.

Intelligent Dual Control (DCT) for Optimal Comfort and Health

Gree's Intelligent Dual Control Technology (DCT) for both temperature and humidity aims to provide not only a comfortable environment, but a healthy environment as well. The aim is to avoid extremes in dryness causing dry skin and chest discomfort and high humidity providing a breeding ground for mould and bacteria.

Advanced Noise Reduction for Indoor and Outdoor Units

Gree researchers have developed smart innovative ways to reduce the noise levels of both the indoor and outdoor units, other than just slowing the fan speed. Newly developed designs have helped to reduce abnormal noises and achieve producing a quiet 19dB(A) sound level on the indoor. And to reduce the noise of the outdoor, especially the high frequency compressor, Gree have adopted Harmonic sampling to shape and smooth the waveform, thus reducing noise levels. After shaping, the outdoor noise level has been reduced by 3~4dB.











Gree Mini ERV (Optional)

The Kea AI heat pumps can be fitted with a colour matched mini ERV, which can be installed on either side and has independent activation. The replaceable HEPA filters can be fitted from either side plus there is a washable dust filter providing protection.

The mini ERV comes complete with a rain and rodent proof protective cover for the outdoor air vents.

There are three ways to control the mini ERV, with the standard remote controller, an optional wired controller or by the Gree Wi-Fi app. The airflow is channels through a dual-way "figure eight" track and can deliver up to 30m3/hr (8.31 l/sec)



Features



G-AI Energy-saving Technology



Direct-blow



Filter Cleaning



Coldplasma Air Purification



Comfortable Sleep Curves



Intelligent Defrosting



Low Voltage Startup



Auto Restart



R32 Refrigerant



Night Mode



Energy Saving



8°C Heating



Dred



Dehumidifying



Healthy Filters



Quiet Design



Wifi Control



Self-Cleaning



3D Airflow



3D Inverter



LED Display



Timer





Self-Diagnosis **Turbo Button**

Indoor Unit Model Outdoor Unit Model		GWH09AVCXD -K6DNA1A/I	GWH12AVDXD -K6DNA1A/I	GWH18AVEXF -K6DNA1A/I	GWH24AVEXH -K6DNA1C/I GWH24AVEXH -K6DNA1C/O	
		GWH09AVCXD	GWH12AVDXD	GWH18AVEXF		
		-K6DNA1A/O	-K6DNA1A/O	-K6DNA1A/O		
RE Part Number		AC7252*-I/O	AC7253*-I/O	AC7255*-I/O AAC8424	AC7257*-I/O AAC8579	
GEMS Reg Numbe	r	AAC8506	AAC8399			
		Pe	rformance			
Cooling (Min-Max)	kW	2.70 (0.66-3.40)	3.52 (0.55-4.70)	5.00 (1.70-6.00)	7.10 (1.55-9.70)	
Heating (Min-Max)	kW	3.20 (0.70-4.80)	4.00 (0.80-4.60)	6.00 (1.50-7.20)	7.80(2.10-10.60)	
Cooling Power Input	kW	0.57	0.80	1.25	1.84	
Heating Power Input	kW	0.71	0.86	1.40	2.00	
AEER	W/W	4.7	4.4	3.94	3.80	
ACOP	W/W	4.5	4.56	4.23	3.85	
Heating Capcity H2	kW	3.85	4.00	6.4	8.20	
Power Input Heating H2	kW	1.35	1.32	2.46	3.55	
Hot (Cooling / Heating)	Star Rating	5.5/4.0	5.5/4.0	4.5/3.5	4.5/3.5	
Average (Cooling / Heating)	Star Rating	5.0/3.0	5/3.5	4.0/3.0	4.0/2.5	
Cold (Cooling / Heating)	Star Rating	5.0/2.5	5.5/2.5	4.0/2.5	4.5/2.0	
Dehumidifying Volume	L/Hr	0.8	1.6	1.8	3.5	
Air Flow Volume (Max)	L/Sec	189	264	375	389	
Sound Pressure (min/max) Ind	dB(A)	19~42	22~44	26~46	29~51	
Sound Power (min/max) Ind	dB(A)	34~57	37~59	41~63	43~66	
Sound Pressure / Power Out	dB(A)	53/61	54/64	60/69	62	
	, ,	[Electrical	<u> </u>	<u> </u>	
Power Supply Outdoor	V/Hz/Ph	220~240/50/1	220~240/50/1	220~240/50/1	220~240/50/1	
Circuit Breaker	A	16	16	25	25	
Max Current	A	6.2	8.0	15.0	18.0	
Max Input	W	1550	1600	3300	4400	
Recommended Power Cable	-					
Control Wiring	_		2 Core plus Earth (3 Cores) 2.5mm 3 Core plus earth (4 Cores) 1.5mm			
		Dimensi	ons and Weights			
Indoor Dimensions (HxWxD)	mm	292x907x200	347x970x257	347x1110x257	347x1110x257	
Indoor Net Weight	kg	10.5	15.0	17.5	18.0	
Outdoor Dimensions (HxWxD)	mm	555x802x350	555x802x350	660x958x402	746x1000x427	
Outdoor Net Weight	kg	30.0	30.0	41.5	52.5	
Outdoor Net Weight	Ng Ng		ıstallation	41.5	32.3	
Operating Temp Range Cool	°C	-15 ~ 56	-15~56	-15 ~ 56	-15 ~ 56	
Operating Temp Range Heat	°C	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 36 -15 ~ 24	
	-	R32	R32	-15~24 R32	-15~24 R32	
Refrigerant Type		0.77		1.2		
Refrigerant Charge	kg		0.85		1.6	
Max Pipe Length (pre-charged)	m	15 (10)	20 (10)	25 (10)	25 (10)	
Max Height	m	10	10	10	10	
Additional Refrigerant	g/m	16	16	16	40	
Pipe Connection	Inch	1/4" ~ 3/8"	1/4" ~ 3/8"	1/4" ~ 1/2"	1/4" ~ 5/8"	

Features and Options							
Indoor Fascia Colour*	*White or *Black		Dry Contact On/off Control	Standard			
Coil Protection	Gold Fin Anti-Corrosion Coating		Cold Plasma Air Purify	Standard			
Remote Controller	YBE1FB9 (White)		Wi-Fi Function	Blue Tooth Wi-Fi			
Weekly Wired Controller	Optional (XK76)		G-Al Function	Standard			
Fresh Air Adaptor	Optional (Mini ERV)		Demand Response AS4755	Standard			















Gree NZ supports BirdCare Aotearoa

For Installation and Sales:

For Parts and Warranty:



www.greeac.co.nz

0800 BUY GREE 0800 289 4733